
D'EUSANIO
RIMORCHI
Quality and experience
at your experience
D'EUSANIO
D'EUSANIO
RIMORCHI
PRODUCTS CATALOG



DRM HOBBY

SINGLE AXLE TRAILER WITH MECHANICAL TILTING SYSTEM. UP TO 1.800 KG CAPACITY.



STANDARD EQUIPMENTS

- MECHANICAL TILTING PLATFORM
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- SMOOTH PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- MECHANICAL PARKING BRAKE
- BRAND-NEW 5 HOLES TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRM 12	DRM 15	DRM 18
Dimensions (cm)	130x180 - H sideboard: 30	140x210 - H sideboard: 30	150x250 - H sideboard: 35
Total capacity rate (kg)	1200	1500	1800
Unladen Weight (kg)	258	278	378
Pneumatic	205/60 R15	205/60 R15	205/60 R15

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



CEREALS NOZZLE



HYDRAULIC DUMPING KIT WITH DOUBLE EFFFECT PISTON



DOUBLE SIDEBOARD



DRM STANDARD

SINGLE AXLE TRAILER WITH MECHANICAL TILTING SYSTEM. UP TO 3.000 KG CAPACITY.



STANDARD EQUIPMENTS

- MECHANICAL TILTING PLATFORM
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- SMOOTH PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- MECHANICAL PARKING BRAKE AND HYDRAULIC BRAKE
- BRAND-NEW 5 HOLES TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRM 20	DRM 25	DRM 30
Dimensions (cm)	140x220 - H sideboard: 40	150x250 - H sideboard: 40	160x260 - H sideboard: 40
Total capacity rate (kg)	2000	2500	3000
Unladen Weight (kg)	400	490	510
Pneumatic	215/70 R15	215/70 R15	215/70 R15

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



CEREALS NOZZLE



HOT ZINC-COATED A SIDEBOARDS

OPTIONAL




DOUBLE SIDEBOARD



UP SIDE DOWN OPENING REAR STEERING COLUMN



HYDRAULIC BRAKE



STRAITED PLATE PLATFORM



DRP

SINGLE AXLE TRAILER WITH REAR HYDRAULIC TITLTING SYSTEM. UP TO 2.800 KG CAPACITY.







TECHNICAL INFORMATION

MOD.	DRP 20	DRP 30
Dimensions (cm)	140x220 - H sideboard: 40	150x250x - H sideboard: 40
Total capacity rate (kg)	2000	2800
Unladen Weight (kg)	450	540
Pneumatic	22.5x8.0-12	10.0/80 PR10

STANDARD EQUIPMENTS

- HYDRAULIC TILTING REAR PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- PRESSED METAL SHEET REINFORCED FRAME
- 5 COLUMNS “ADR” AXLE
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- SMOOTH PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE
- BRAND-NEW 5 HOLES TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL


SIDE WINCH HEAD


HYDRAULIC BRAKE


ZINC-COATED TOOLBOX


STRAITED PLATE PLATFORM


UP SIDE DOWN OPENING REAR STEERING COLUMN TRILATERALE



HOT ZINC-COATED SIDEBOARDS


DOUBLE SIDEBOARD


CEREALS NOZZLE

DRT

SINGLE AXLE TRAILER WITH TRILATERAL HYDRAULIC TILTING SYSTEM. UP TO 5.000 KG CAPACITY.

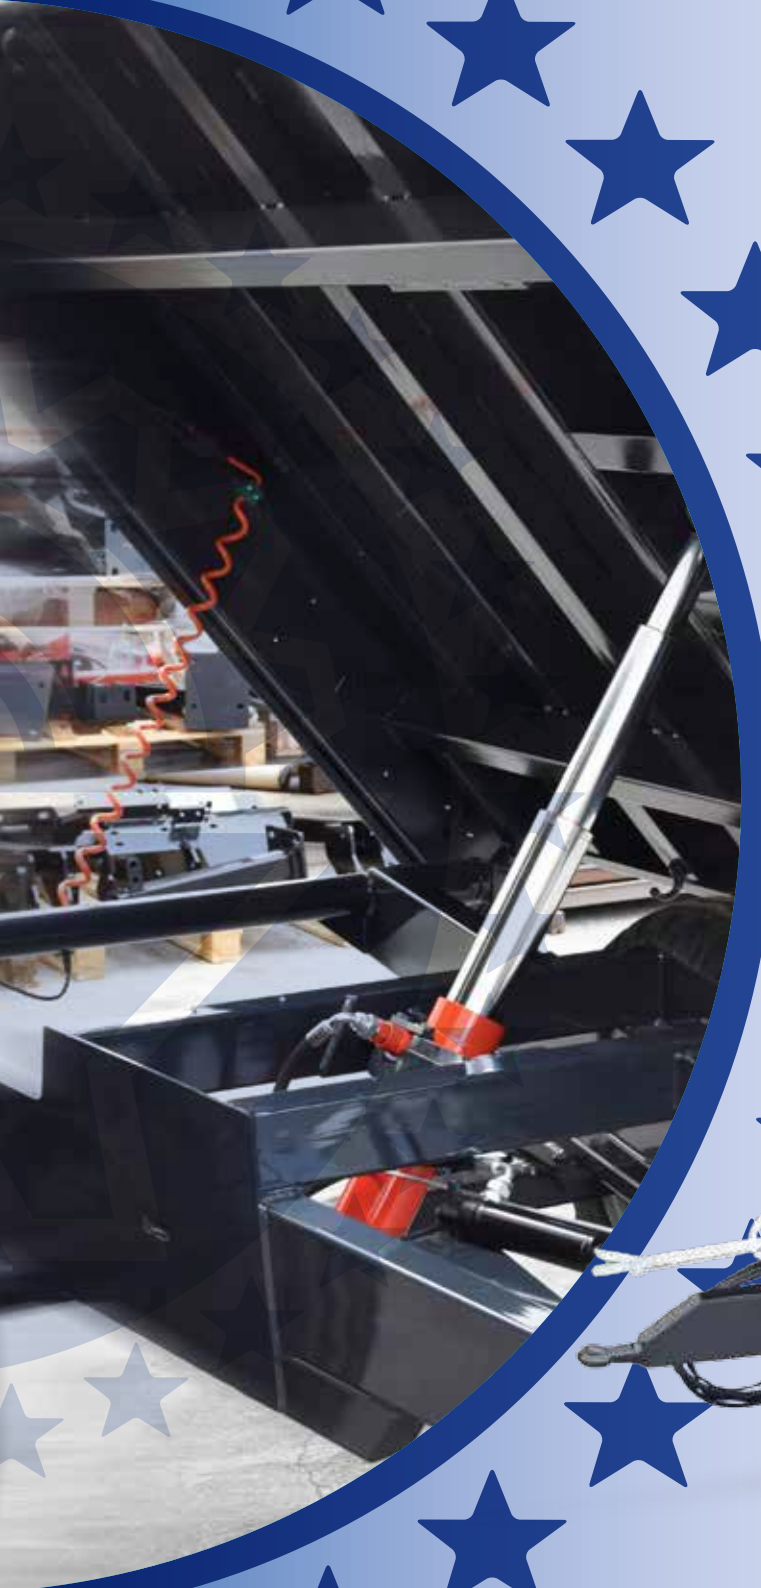







TECHNICAL INFORMATION

MOD.	DRT 25	DRT 35	DRT 40-E1	DRT 40-E2	DRT 40-E3	DRT 42	DRT 50	DRT 50-E
Dimensions (cm)	150x250 H side-board: 40	160x260 H side-board: 40	170x280 H side-board: 40	180x280 H side-board: 40	180x300 H side-board: 40	180x300 H side-board: 50	200x350 H side-board: 50	200x380 H side-board: 50
Total capacity rate (kg)	2500	3000	3700	3700	3700	4200	5000	5000
Unladen Weight (kg)	630	650	700	720	750	860	1080	1160
Pneumatic	10,0/80 - 12 PR 10	10,0/80 - 12 PR 10	10,0/75 - 15,3 PR 12	10,0/75 - 15,3 PR 12	10,0/75 - 15,3 PR 12	10,0/75 - 15,3 PR 14	11,5/80 - 15,3 PR14	11,5/80 - 15,3 PR14

STANDARD EQUIPMENTS

- HYDRAULIC TILTING TRILATERAL PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- HIGH RESISTANCE REINFORCED STRUCTURE
- 6 COLUMNS “ADR” AXLE
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- BOTTOM-UP OPENING REAR SIDEBOARD STEERING COLUMN
- SMOOTH PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE
- BRAND-NEW 6 HOLES TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REAR HOSE GREASE NIPPLE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



HYDRAULIC BRAKE



ZINC-COATED TOOLBOX



STRAITED PLATE PLATFORM



UP SIDE DOWN OPENING FRONT STEERING COLUMN



HOT ZINC-COATED SIDEBOARDS



DOUBLE SIDEBOARD



CEREALS NOZZLE



HYDRAULIC STAND FOOT



TAIL LIGHT NET COVER

DRT-DMN

SINGLE AXLE TRAILER WITH TRILATERAL HYDRAULIC TILTING SYSTEM. UP TO 6.000 KG CAPACITY.



TECHNICAL INFORMATION

MOD.	DRT60E A	DRT60E B	DRT60E C	DRT60E D	DRT60E E	DRT60E F	DRT60E G	DRT60E H	DRT60E I	DMN-60-45
Dimensions (cm)	170X280 H sideboard: 40	180X280 H sideboard: 40	180x300 H sideboard: 40	180x350 H sideboard: 40	200X350 H sideboard: 50	200X380 H sideboard: 50	200X400 H sideboard: 50	210X410 H sideboard: 50	220X420 H sideboard: 50	230x450 H sponda: 50
Total capacity rate (kg)	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Unladen Weight (kg)	920	960	1000	1200	1210	1250	1370	1410	1450	1400
Pneumatic		13.0/55 - 16 PR 18		13.0/55 - 16 PR 18	13,0/55-16 PR18	13,0/55-16 PR18		13,0/55-16 PR18 205/65 R17.5 twins		13,0/55-16 PR18 225/75 R17.5 twins

STANDARD EQUIPMENTS

- HYDRAULIC TILTING TRILATERAL PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- HIGH RESISTANCE REINFORCED STRUCTURE
- 6 COLUMNS “ADR” AXLE
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- DMN 60-45: HALF DOTTED LATERAL SIDEBOARDS
- BOTTOM-UP OPENING REAR SIDEBOARD STEERING COLUMN
- SMOOTH PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- MECHANICAL PARKING BRAKE AND HYDRAULIC BRAKING SYSTEM
- 6 HOLES TYRES
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REAR HOSE GREASE NIPPLE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



STRAITED PLATE PLATFORM



FRONT STEERING COLUMNS WITH TRILATERAL UPSIDE DOWN OPENING SYSTEM



HOT ZINC-COATED SIDEBOARDS



DOUBLE SIDEBOARD



CEREALS NOZZLE



HYDRAULIC STAND FOOT



TAIL LIGHT NET COVER

DRT-DMN HEAVY VERSION

TRILATERAL HYDRAULIC TILTING SYSTEM
PLATFORM TRAILER. UP TO 6.000 KG CAPACITY







TECHNICAL INFORMATION

MOD.	DRT 60			DMN 80
Dimensions (cm)	200X380 H sideboard: 50	210x410 H sideboard: 50	220x420 H sideboard: 50	235x500 H sideboard: 50
Total capacity rate (kg)	6000	6000	6000	6000
Unladen Weight (kg)	1780	1790	1800	2280
Pneumatic		385/55 R19.5 205/75 - R17,5 twins		385/55 R19.5 215/75 - R17,5 twins

STANDARD EQUIPMENTS

- HYDRAULIC TILTING TRILATERAL PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STRAITED PLATE PLATFORM
- HIGH RESISTANCE REINFORCED STRUCTURE
- "ADR" AXLE
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- BOTTOM-UP OPENING REAR SIDEBOARD STEERING COLUMN
- DMN80 HALF DOTTED LATERAL SIDEBOARDS
- SMOOTH/STRAITED PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- HYDRAULIC BRAKE WITH HANDWHEEL PARKING BRAKE (PEDAL BRAKE UPON REQUEST)
- SINGLE/TWIN INDUSTRIAL TYRES WITH 8 HOLES RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REAR HOSE GREASE NIPPLE
- PARACHUTE END-STROKE VALVE
- FOOT STAND EQUIPPED WITH ADAPTER AND BEARING
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



HYDRAULIC STAND FOOT



FRONT STEERING COLUMNS WITH TRILATERAL UPSIDE DOWN OPENING SYSTEM



HOT ZINC-COATED SIDEBOARDS



DOUBLE SIDEBOARD



CEREALS NOZZLE



LEAF SPRING SUSPENSIONS

DMN TWO AXLES

TRILATERAL HYDRAULIC TILTING SYSTEM BI AXLE
TRAILER. UP TO 14.000 KG CAPACITY





TECHNICAL INFORMATION

MOD.	DMN 100	DMN 120	DMN 140-5	DMN 140
Dimensions (cm)	240x500 - H sideboard: 50	240x600 - H sideboard: 60	240x500 - H sideboard: 60	240x630 - H sideboard: 60
Total capacity rate (kg)	10000	12000	14000	14000
Unladen Weight (kg)	2700	3700	3800	4300
Pneumatic	215/75 R17,5 twins 285/70 - R19,5 single			

STANDARD EQUIPMENTS

- HYDRAULIC TILTING TRILATERAL PLATFORM BY DOUBLE EFFECT RAM

AND QUICK CONNECTION WITH TRACTOR OIL

- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES
- THREE SIDE OPENING PAINTED HALF CUT SIDEBOARDS
- FRONT, CENTRAL AND REAR STEERING COLUMN WITH ONLY REAR SIDEBOAR BOTTOM-UP OPENING
- SMOOTH/STRAITED PLATE PLATFORM
- 2 HEADS/SIDE WINCH
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- TWIN TYRES OR INDUSTRIAL SINGLE TYRE WITH 8 HOLES RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REAR HOSE GREASE NIPPLE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



FRONT STEERING COLUMNS WITH TRILATERAL UPSIDE DOWN OPENING SYSTEM



HOT ZINC-COATED SIDEBOARDS



DOUBLE SIDEBOARD



CEREALS NOZZLE



REAR STEERING AXLE



SUPPORT FOR TARPAULIN COVERAGE

DRT-M

ENGINE SINGLE AXLE TRAILER WITH TRILATERAL TITLTING SYSTEM. UP TO 6.000 KG CAPACITY









TECHNICAL INFORMATION

MOD.	DRT 25M	DRT 35M	DRT 40-EM	DRT 40-EM	DRT 40-EM	DRT 42M	DRT 50M	DRT 60-EM
Dimensions (cm)	150x250 H sideboard: 40	160x260 H sideboard: 40	170x280 H sideboard: 40	180x280 H sideboard: 40	180x300 H sideboard: 40	180x300 H sideboard: 50	200x350 H sideboard: 50	200x380 H sideboard: 50
Total capacity rate (kg)	2500	3000	3700	3700	3700	4200	6000	6000
Unladen Weight (kg)	730	750	800	820	850	950	1210	1260
Pneumatic	10,0/75 - 15,3 PR12	10,0/75 - 15,3 PR12	10,0/75 - 15,3 R 12	10,0/75 - 15,3 R 12	10,0/75 - 15,3 R 12	10,0/75 - 15,3 PR14	11,5/80 - 15,3 PR14	11,5/80 - 15,3 PR18

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



STRAITED PLATE PLATFORM



HYDRAULIC STAND FOOT



CARDAN JOINT

OPTIONAL



HOT ZINC-COATED SIDEBOARDS



DOUBLE SIDEBOARD



CEREALS NOZZLE



POLE HOLDER HOSES EACH ONE



FRONT STEERING COLUMNS WITH TRILATERAL UPSIDE DOWN OPENING SYSTEM

STANDARD EQUIPMENTS

- HYDRAULIC TILTING TRILATERAL PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- HIGH RESISTANCE REINFORCED STRUCTURE
- 6 COLUMS ENGINE AXLE
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- BOTTOM-UP OPENING REAR SIDEBOARD STEERING COLUMN
- SMOOTH PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- PARKING BRAKE AND HYDRAULIC BRAKE
- BRAND-NEW 6 HOLES “TRACTOR” TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REAR HOSE GREASE NIPPLE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

DMN-TC

TRILATERAL HYDRAULIC TILTING SYSTEM AND RECLINABLE PLATFORM
FOR TRACTORS LOADING FARMING TRAILER. UP TO 6.000 KG CAPACITY.



TECHNICAL INFORMATION

MOD.	DMN-60E A	DMN-60E B	DMN-60E C	DMN-60E D	DMN-60-45	DMN 80 TC2
Dimensions (cm)	180X350 H sideboard: 50	200X400 H sideboard: 50	210x410 H sideboard: 50	220x420 H sideboard: 50	230x450x50	235x500x50
Total capacity rate (kg)	6000	6000	6000	6000	6000	6000
Unladen Weight (kg)	1530	1560	1600	1640	1400	2280
Pneumatic	215/75 - R17,5 twins				225/70 R15 twins	215/75 - R17,5 twins

STANDARD EQUIPMENTS

- HYDRAULIC TILTING TRILATERAL PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STRAITED PLATE PLATFORM
- DOUBLE HYDRAULIC INCLINABLE SHELL WITH DOUBLE EFFECT RAM
- HIGH RESISTANCE REINFORCED STRUCTURE
- "ADR" AXLE UPDATED
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- BOTTOM-UP OPENING REAR SIDEBOARD STEERING COLUMN
- DMN80 TC/DMN 60-45: HALF DOTTED LATERAL SIDEBOARDS
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- HYDRAULIC BRAKE WITH HANDWHEEL PARKING BRAKE (PEDAL BRAKE UPON REQUEST)
- TWIN TYRES WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REAR HOSE GREASE NIPPLE
- PARACHUTE END-STROKE VALVE
- FOOT STAND EQUIPPED WITH ADAPTER AND BEARING
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



MANUAL CRAWLER TRACTORS LOADING RAMPS



ZINC-COATED TOOLBOX



HYDRAULIC REAR RAMPS



HYDRAULIC STAND FOOT



FRONT STEERING COLUMNS WITH TRILATERAL UPSIDE DOWN OPENING SYSTEM



HOT ZINC-COATED SIDEBOARDS



DOUBLE SIDEBOARD



CEREALS NOZZLE

DMN-TC TWO AXLES

TRILATERAL HYDRAULIC TILTING SYSTEM AND RECLINABLE PLATFORM
FOR TRACTORS LOADING FARMING TRAILER. UP TO 14.000 KG CAPACITY.





TECHNICAL INFORMATION

MOD.	DMN 100TC	DMN 120TC	DMN 140-5TC	DMN 140TC
Dimensions (cm)	240x500 - H sideboard: 50	240x600 - H sideboard: 60	240x500 - H sideboard: 60	240x630 - H sideboard: 60
Total capacity rate (kg)	10000	12000	14000	14000
Unladen Weight (kg)	2850	3850	3950	4450
Pneumatic	215/75 R17,5 Twins			

STANDARD EQUIPMENTS

- HYDRAULIC TILTING TRILATERAL PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- DOUBLE HYDRAULIC INCLINABLE SHELL WITH DOUBLE EFFECT RAM
- HIGH RESISTANCE REINFORCED STRUCTURE
- "ADR" AXLE 8 COLUMNS UPDATED
- PAINTED THREE SIDES EXTENDABLE SIDEBOARDS
- HALF DOTTED LATERAL SIDEBOARDS
- BOTTOM-UP OPENING REAR SIDEBOARD STEERING COLUMN
- STRAITED PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- HYDRAULIC OR AIR BRAKE
- TWIN TYRES WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REAR HOSE GREASE NIPPLE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



MANUAL CRAWLER TRACTORS LOADING RAMPS



ZINC-COATED TOOLBOX



HYDRAULIC REAR RAMPS



FRONT STEERING COLUMNS WITH TRILATERAL UPSIDE DOWN OPENING SYSTEM



HOT ZINC-COATED SIDEBOARDS



DOUBLE SIDEBOARD



CEREALS NOZZLE



STEERING AXLE



SUPPORT FOR TARPAULIN COVERAGE

DRTC EXTERNAL WHEELS

LOW PLATFORM TRIALER AND EXTERNAL WHEELS. FOR FARMING CRAWLER MACHINES. UP TO 5.000 KG CAPACITY.








STANDARD EQUIPMENTS

- TILTING PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- HIGH RESISTANCE REINFORCED STRUCTURE
- 6 COLUMNS “ADR” AXLE
- STRAITED PLATE PLATFORM
- PAINTED SHEET METAL FENDERS
- FLATBED STRAPS FOR CRAWLER TRACKS GRIP
- 2 WINCH HEADS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE
- SIDE HOOKS
- BRAND-NEW 6 HOLES TYRES
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRTC 42	DRTC 46A	DRTC 50A
Dimensions (cm)	150x350	175X350	180X400
Total capacity rate (kg)	4200	4600	5000
Unladen Weight (kg)	800	860	1050
Pneumatic	11,5/80 - 15,3 PR8	11,5/80 - 15,3 PR12	235/75 - R17,5

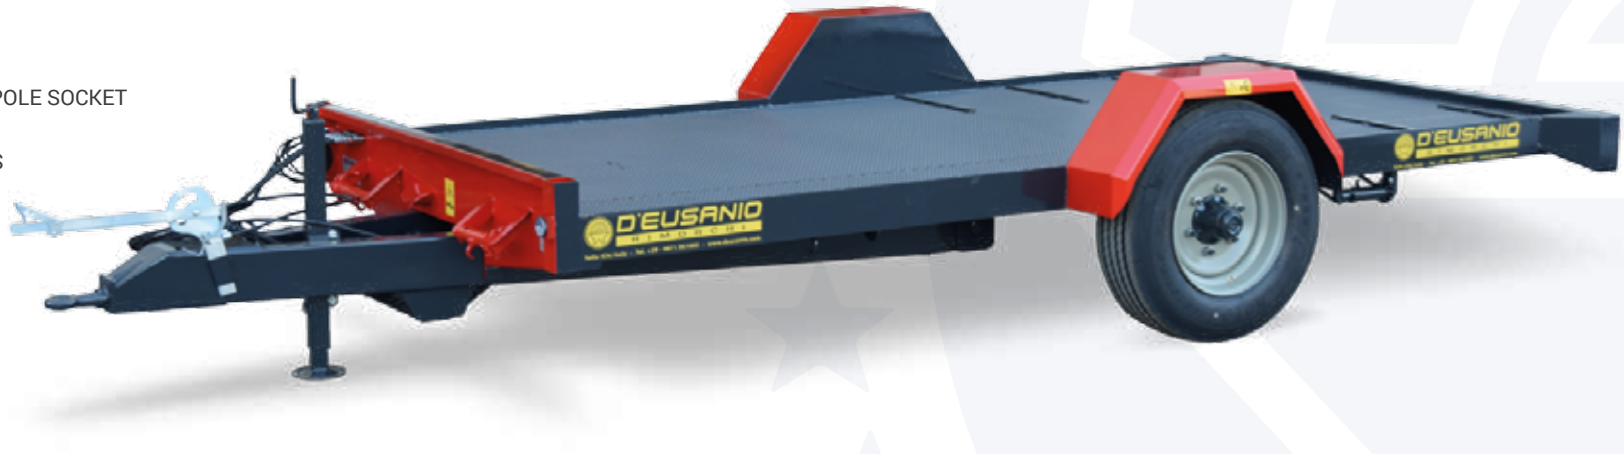

OPTIONAL



SIDE WINCH HEAD



HYDRAULIC BRAKE



ZINC-COATED TOOLBOX



HYDRAULIC STAND FOOT



OPENING SIDEBOARDS



40 CM HEIGTH REAR PLATFORM FOR THE WHOLE LENGTH



FRONT ROLLS SUPPORT Q.70X70MM



SINGLE PLATFORMS. HEIGTH: 40 CM



DRTC SINGLE AXLE

PLATFORM TRAILER FOR FARMING MACHINES
AND BALES TRANSPORT. UP TO 6.000 KG CAPACITY.



Rear rolls support



STANDARD EQUIPMENTS

- TILTING PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION

WITH TRACTOR OIL

- HIGH RESISTANCE REINFORCED STRUCTURE
- "ADR" AXLE 8 COLUMNS UPDATED
- STRAITED PLATE PLATFORM
- FLATBED STRAPS FOR CRAWLER TRACKS GRIP
- 2 HEADS/SIDE WINCH
- 40 CM HEIGTH SIDEBOARD FOR THE WHOLE LENGHT
- SIDE AND CENTRAL CROSSBEAM FOR HEAVY MACHINERY LOADING
- LOADING EDGE WITH REINFORCED PLATE
- SIDE HOOKS
- HYDRAULIC BRAKE WITH HANDWHEEL PARKING BRAKE (PEDAL BRAKE UPON REQUEST)
- TWIN TYRES OR TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND EQUIPPED WITH ADAPTER AND BEARING
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRTC 50	DRTC 60-2		DRTC 60L		DRTC 60-6	DRTC 60-6 HEAVY VERSION	DRTC 60-8
Dimensions (cm)	210x410	200x550	210x550	220X500	245x510	245x600	245x600	245x800
Total capacity rate (kg)	5000	6000	6000	6000	6000	6000	6000	6000
Unladen Weight (kg)	1140	1450	1470	1400	1600	1700	2100	2500
Pneumatic	225/70 R15 twins 13.0/55 - 16	215/75 R17,5 twins 435/50 R19,5 single						

OPTIONAL



SIDE WINCH HEAD



HYDRAULIC BRAKE



ZINC-COATED TOOLBOX



HYDRAULIC STAND FOOT



OPENING SIDEBOARDS



REAR ROLLS SUPPORT



FRONT ROLLS SUPPORT Q.70X70MM



MANUAL CRAWLER TRACTORS LOADING RAMPS WITH SUPPORT STANDS



HYDRAULIC REAR RAMPS WITH SUPPORT STANDS



AIR BRAKING SYSTEM

DRTC TWO AXLES

LOW PLATFORM TRAILER AND EXTERNAL WHEELS. FOR FARMING CRAWLER MACHINES, LARGE CASES AND HAY BALES TRANSPORT. UP TO 9.000 KG CAPACITY.



STANDARD EQUIPMENTS

- TILTING PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION

WITH TRACTOR OIL

- HIGH RESISTANCE REINFORCED STRUCTURE
- "ADR" AXLE AND LEAF SPRING SUSPENSIONS
- STRAITED PLATE PLATFORM
- FLATBED STRAPS FOR CRAWLER TRACKS GRIP
- 2 HEADS/SIDE WINCH
- 40 CM HEIGTH SIDEBOARD FOR THE WHOLE LENGHT
- SIDE AND CENTRAL CROSSBEAM FOR HEAVY MACHINERY LOADING
- LOADING EDGE WITH REINFORCED PLATE
- SIDE HOOKS
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF

PARKING BRAKE (standard only DRTC 90)

- BRAND-NEW 6 HOLES TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR

RESISTANCE

- PARACHUTE END-STROKE VALVE
- FOOT STAND EQUIPPED WITH ADAPTER AND BEARING
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DR2 60-B/A	DR2 60B	DRTC 60-B	DRTC 90
Dimensions (cm)	160 x 390	160 x 440	230 x 450	245 x 600
Total capacity rate (kg)	6000	6000	6000	9000
Unladen Weight (kg)	1240	1300	1650	2500
Pneumatic	200/60-14,5 PR14	200/60-14,5 PR14	200/60-14,5 PR14	10,0/75-15,3 PR18 Single 215/70 R15 Twins



OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



HYDRAULIC STAND FOOT



REAR ROLLS SUPPORT



FRONT ROLLS SUPPORT Q.70X70MM



MANUAL CRAWLER TRACTORS LOADING RAMPS WITH SUPPORT STANDS



HYDRAULIC REAR RAMPS WITH SUPPORT STANDS

DRTC TWO AXLES

LOW PLATFORM TRIALER AND EXTERNAL WHEELS.
FOR FARMING CRAWLER MACHINES, LARGE CASES
AND HAY BALES. UP TO 12.000 KG CAPACITY.







STANDARD EQUIPMENTS

- TILTING PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES
- REAR SELF-STEERING AXLE
- STRAITED PLATE PLATFORM
- FLATBED STRAPS FOR CRAWLER TRACKS GRIP
- 2 HEADS/SIDE WINCH
- 40 CM HEIGTH SIDEBOARD FOR THE WHOLE LENGHT
- SIDE AND CENTRAL CROSSBEAM FOR HEAVY MACHINERY LOADING
- LATERAL EXTENDABLE SIDEBOARD
- SIDE HOOKS
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- TWIN TYRES WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- FOOT STAND EQUIPPED WITH ADAPTER AND BEARING
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRTC 120-5
Dimensions (cm)	220x510
Total capacity rate (kg)	12000
Unladen Weight (kg)	3100
Braking	PNEUMATICS HYDRAULIC
Pneumatic	215/65 R17,5 Twins



OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



HYDRAULIC STAND FOOT



OPENING SIDEBOARDS



REAR ROLLS SUPPORT



FRONT ROLLS SUPPORT Q.70X70MM



MANUAL CRAWLER TRACTORS LOADING RAMPS WITH SUPPORT STANDS



HYDRAULIC REAR RAMPS WITH SUPPORT STANDS

DRTC TWO AXLES

LOW PLATFORM TRAILER AND EXTERNAL WHEELS. FOR FARMING CRAWLER MACHINES, LARGE CASES AND HAY BALES TRANSPORT. UP TO 14.000 KG CAPACITY.



STANDARD EQUIPMENTS

- TILTING PLATFORM BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES
- FIXED REAR AXLE
- STRAITED PLATE PLATFORM
- FLATBED STRAPS FOR CRAWLER TRACKS GRIP
- 2 HEADS/SIDE WINCH
- 40 CM HEIGTH SIDEBOARD FOR THE WHOLE LENGHT
- SIDE AND CENTRAL CROSSBEAM FOR HEAVY MACHINERY LOADING
- LOADING EDGE WITH REINFORCED PLATE
- SIDE HOOKS
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- TWIN TYRES OR TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRTC 120	DRTC 140/65	DRTC 140/70	DRTC 140/75	DRTC 140/82
Dimensions (cm)	250x750	250x650	250x700	250x750	250x820
Total capacity rate (kg)	12000	14000	14000	14000	14000
Unladen Weight (kg)	3060	3300	3350	3400	3520
Braking	PNEUMATICS HYDRAULIC				
Pneumatic	215/75 R17,5 Twins - 385/65 R19,5 Single				



OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



OPENING SIDEBOARDS



REAR ROLLS SUPPORT



FRONT ROLLS SUPPORT Q.70X70MM



MANUAL CRAWLER TRACTORS LOADING RAMPS WITH SUPPORT STANDS



HYDRAULIC REAR RAMPS WITH SUPPORT STANDS



STEERING AXLE



DR FIXED PLATFORM

FIXED PLATFORM FARMING TRAILER WITH REAR DOCKS
AND RAMPS FOR LOADING. UP TO 20.000 KG CAPACITY.

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED
TOOLBOX



OPENING
SIDEBOARDS



FRONT ROLLS
SUPPORT

Two axles version



STANDARD EQUIPMENTS

- FIXED PLATFORM WITH REAR RAMP
- HYDRAULIC RAMPS WITH BLOCK VALVE AND AUTOMATIC APPLICATION STEERING COLUMN
- HIGH RESISTANCE REINFORCED STRUCTURE WITH HEB BEAM
- LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES
- REAR SELF-STEERING AXLE WITH THROUGH DOUBLE PISTON (DR 200 il 1°and 3° self-steering axle)
- STRAITED PLATE PLATFORM WITH REAR RAMP
- FLATBED STRAPS FOR CRAWLER TRACKS GRIP
- 2 HEADS/SIDE WINCH
- SIDE AND CENTRAL CROSSBEAM FOR HEAVY MACHINERY LOADING
- LOADING EDGE WITH REINFORCED PLATE
- SIDE HOOKS
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- TWIN TYRES OR TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS AND RUBBER VIBRATION DAMPERS
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DR 120 T-70	DR 140 T-70	DR 200 T-82
Dimensions (cm)	250x700	250x700	250x820
Axles no.	2	2	3
Total capacity rate (kg)	12000	14000	20000
Unladen Weight (kg)	4040	4040	5270
Braking	PNEUMATICS HYDRAULIC	PNEUMATICS HYDRAULIC	PNEUMATICS HYDRAULIC
Pneumatic		215/75 R17,5 Twins 385/65 R19,5 Single	

Three axles version



DR200

FIXED PLATFORM TRAILER WITH FRONT FIFTH WHEEL COUPLING DEVICE. UP TO 20.000 KG CAPACITY.



STANDARD EQUIPMENTS

- STRAITED PLATE PLATFORM WITH REAR RAMP
- HYDRAULIC RAMPS WITH BLOCK VALVE AND AUTOMATICALLY INSERT FOOT STAND
- INDUTRIAL FIFTH WHEEL COUPLING PIN
- HIGH RESISTANCE REINFORCED STRUCTURE WITH HEB BEAM
- LEAF SPRING SUSPENSIONS CON ASSALI "ADR" 10 COLUMNS INCREASED AXLES
- REAR SELF-STEERING AXLE
- FLATBED STRAPS FOR CRAWLER TRACKS GRIP
- 2 HEADS/SIDE WINCH
- SIDE AND CENTRAL CROSSBEAM FOR HEAVY MACHINERY LOADING
- LOADING EDGE WITH REINFORCED PLATE
- SIDE HOOKS
- AIR BRAKE SYSTEM WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE
- TWIN TYRES OR TWHEEL WITH 10 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS AND RUBBER VIBRATION DAMPERS
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



OPENING SIDEBOARDS



FRONT ROLLS SUPPORT Q.70X70MM

TECHNICAL INFORMATION

MOD.	DR200 R 91	DR200 R 97
Dimensions (cm)	252X910	252X970
Total capacity rate (kg)	20000	20000
Unladen Weight (kg)	61200	62000
Braking	AIR	AIR
Pneumatic	235/75 R 17.5 10 HOLES	235/75 R 17.5 10 HOLES



DRTB ROLLERS

HYDRAULIC TITLTING PLATFORM SINGLE AXLE
TRAILER FOR LARGE CASES CARRIAGE.
UP TO 3.500 KG CAPACITY.



TECHNICAL INFORMATION

MOD.	DRTB 25 R4	DRTB 35 R4
Dimensions (cm)	120x345	120x450
Total capacity rate (kg)	3500	3500
Unladen Weight (kg)	530	610
Bins No.	3	4
Pneumatic	10.0/75 - 15.3 PR12	10.0/75 - 15.3 PR12

STANDARD EQUIPMENTS

- TILTING PLATFORM BY DOUBLE EFFECT PISTON WITH BOLCK VALVE
- 6 COLUMNS “ADR” AXLE
- ADJUSTABLE ROLLER CONVEYOR
- REAR MANUAL OPENING BOX HOLDER
- PAINTED SHEET METAL FENDERS
- 2 WINCH HEADS
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE
- BRAND-NEW 6 HOLES TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES



STAND PLATFORM FOR ALLOWING THE ACCESS TO 2ND ROW

DRTB

FIXED PLATFORM SINGLE AXLE TRAILER FOR LARGE CASES CARRIAGE. UP TO 2.500 KG CAPACITY.



STANDARD EQUIPMENTS

- FIXED PLATFORM WITH REMOVABLE BOXES LOCK BARS
- REMOVABLE FRONT AND REAR PANEL LARGE CASES SECURE
- 5 COLUMNS “ADR” AXLE
- LENGHT ADJUSTABLE HELM
- 2 WINCH HEADS
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE
- BRAND-NEW 5 HOLES TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRTB 25
Dimensions (cm)	130x345
Total capacity rate (kg)	2500
Unladen Weight (kg)	440
Bins No.	3
Pneumatic	22,5x8,0-12 PR12

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



STAND PLATFORM FOR ALLOWING THE ACCESS TO 2ND ROW



BOTTOM COVERAGE METAL SHEET

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX

DRR

FARMING TRAILER REAR TITLTING TANK.
UP TO 14.000 KG CAPACITY.





TECHNICAL INFORMATION

MOD.	DRR 140
Dimensions (cm)	220x500 - H sideboard: 150
Axles No.	2
Total capacity rate (kg)	14000
Unladen Weight (kg)	4450
Capacity (m^3)	16,5
Pneumatic	435/50 R19,5 single

STANDARD EQUIPMENTS

- REAR TITLTING TANK BY RAM AND QUICK CONNECTION WITH TRACTOR OIL
- HYDRAULIC BEAMING REAR DOOR WITH LOCKING PIN
- INDUTRIAL FIFTH WHEEL COUPLING PIN
- HIGH RESISTANCE REINFORCED STRUCTURE WITH HEB BEAM
- PARABOLIC LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES
- AIR BRAKE SYSTEM WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- NON-TOXIC PAINTED INTERIOR TANK FOR FOOD TRANSPORT
- PARACHUTE END-STROKE VALVE
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



REAR FENDER WITH STAINLESS STEEL LIGHTS



INDIPENDENT HYDRAULIC DUMPING SYSTEM WITH PUMP AND TANK UNIT



EXTENDABLE STAINLESS STEEL SIDEBOARD EXTENSION.



SEMIAUTOMATIC COVERAGE SYSTEM



CEREALS NOZZLE



DMP SQAURED TANK

FARMING TRAILER REAR TITLTING TANK.
UP TO 14.000 KG CAPACITY.



TECHNICAL INFORMATION

MOD.	DMP 140-50
Dimensions (cm)	235x550 - H sideboard: 170
Axles No.	2
Total capacity rate (kg)	14000
Unladen Weight (kg)	4800
Capacity (m^3)	21
Pneumatic	385/65 R22,5 single

STANDARD EQUIPMENTS

- REAR TITLTING TANK BY RAM AND QUICK CONNECTION WITH TRACTOR OIL
- HYDRAULIC BEAMING REAR DOOR WITH LOCKING PIN
- HIGH RESISTANCE REINFORCED STRUCTURE
- PARABOLIC LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- NON-TOXIC PAINTED INTERIOR TANK FOR FOOD TRANSPORT
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



SIDE WINCH HEAD



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



CEREALS NOZZLE



REAR FENDER WITH STAINLESS STEEL LIGHTS



INDIPENDENT HYDRAULIC DUMPING SYSTEM WITH PUMP AND TANK UNIT



STEERING AXLE



EXTENDABLE STAINLESS STEEL SIDEBOARD EXTENSION.



SEMIAUTOMATIC COVERAGE SYSTEM



DMP SINGLE AXLE

DUMPER TRAILER FOR TRANSPORT FITTED WITH REAR HYDRAULIC TILTING SYSTEM. UP TO 6.000 KG CAPACITY.





TECHNICAL INFORMATION

MOD.	DMP 60-40
Dimensions (cm)	210x450 - H sideboard: 120
Axles No.	1
Total capacity rate (kg)	6000
Unladen Weight (kg)	1930
Capacity (m^3)	9,5
40 cm height sideboard tank capacity (m^3)	13
Pneumatic	435/50 R19,5 single

STANDARD EQUIPMENTS

- CONIC ROUNDED TILTING TANK BY RAM AND QUICK CONNECTION WITH OIL TRACTOR
- STAINLESS STEEL AISI 304 30/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- HYDRAULIC BEAMING REAR DOOR WITH LOCKING PIN
- INTERCHAGEABLE IDUSTRIAL AND HERMETICALLY SEALED GASKET
- REAR REMOVABLE CONVEYOR
- HIGH RESISTANCE REINFORCED STRUCTURE
- ZINC-COATED INSPECTION STEPLADDER
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- PARACHUTE END-STROKE VALVE
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BREAKING SYSTEM)
- LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES (10 COLUMNS DMP 140-60)
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- HYDRAULIC FOOT STAND (OPTIONAL FOR DMP 60)
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



WATER JERRY CAN



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



REAR FENDER WITH STAINLESS STEEL LIGHTS



HYDRAULIC STAND FOOT



VARNISH IRON SIDEBOARD EXTENSIONS



INDIPENDENT HYDRAULIC DUMPING SYSTEM



STAINLESS STEEL SIDEBOARD EXTENSIONS.



SEMIAUTOMATIC COVERAGE SYSTEM

DMP TWO AXLES

DUMPER TRAILER FOR TRANSPORT FITTED WITH REAR HYDRAULIC TILTING SYSTEM. UP TO 14.000 KG CAPACITY.





TECHNICAL INFORMATION

MOD.	DMP 100-40	DMP 140-45	DMP 140-60 axle Q.120 - 32 Ton.
Dimensions (cm)	210x450 - H sideboard: 120	230x500 - H sideboard: 135	230x650 - H sideboard: 135
Axles No.	2	2	2
Total capacity rate (kg)	10000	14000	14000
Unladen Weight (kg)	2620	3550	4900
Capacity (m^3)	9,5	13,5	18
40 cm height sideboard tank capacity (m^3)	13	18	24
Pneumatic	385/55 R19,5 single	385/55 19,5 single	385/55 R22,5 single

STANDARD EQUIPMENTS

- CONIC ROUNDED TILTING TANK BY RAM AND QUICK CONNECTION WITH OIL TRACTOR
- STAINLESS STEEL AISI 304 30/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- HYDRAULIC BEAMING REAR DOOR WITH LOCKING PIN
- INTERCHAGEABLE IDUSTRIAL AND HERMETICALLY SEALED GASKET
- REAR REMOVABLE CONVEYOR
- HIGH RESISTANCE REINFORCED STRUCTURE
- ZINC-COATED INSPECTION STEPLADDER
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- PARACHUTE END-STROKE VALVE
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BREAKING SYSTEM)
- LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES (10 COLUMNS DMP 140-60)
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- HYDRAULIC FOOT STAND (OPTIONAL FOR DMP 60)
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



WATER JERRY CAN



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



REAR FENDER WITH STAINLESS STEEL LIGHTS



STEERING AXLE



VARNISH IRON SIDEBOARD EXTENSIONS



INDIPENDENT HYDRAULIC DUMPING SYSTEM



STAINLESS STEEL SIDEBOARD EXTENSIONS.



SEMIAUTOMATIC COVERAGE SYSTEM



DMP THREE AXLES

DUMPER TRAILER FOR TRANSPORT FITTED WITH REAR HYDRAULIC TILTING SYSTEM. UP TO 20.000 KG CAPACITY.



TECHNICAL INFORMATION

MOD.	DMP 200-60
Dimensions (cm)	230x650 - H sideboard: 135
Axles No.	3
Total capacity rate (kg)	20000
Unladen Weight (kg)	5200
Capacity (m^3)	18
40 cm height sideboard tank capacity (m^3)	24
Pneumatic	385/55 R22,5

STANDARD EQUIPMENTS

- CONIC ROUNDED TILTING TANK BY RAM AND QUICK CONNECTION WITH OIL TRACTOR
- STAINLESS STEEL AISI 304 30/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- HYDRAULIC BEAMING REAR DOOR WITH LOCKING PIN
- INTERCHAGEABLE IDUSTRIAL AND HERMETICALLY SEALED GASKET
- REAR REMOVABLE CONVEYOR
- HIGH RESISTANCE REINFORCED STRUCTURE
- ZINC-COATED INSPECTION STEPLADDER
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- PARACHUTE END-STROKE VALVE
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BREAKING SYSTEM)
- LEAF SPRING SUSPENSIONS WITH “ADR” 8 COLUMNS INCREASED AXLES (10 COLUMNS DMP 140-60)
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- HYDRAULIC FOOT STAND
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



WATER JERRY CAN



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



REAR FENDER WITH STAINLESS STEEL LIGHTS



VARNISH IRON SIDEBOARD EXTENSIONS



INDIPENDENT HYDRAULIC DUMPING SYSTEM



STAINLESS STEEL SIDEBOARD EXTENSIONS.



SEMIAUTOMATIC COVERAGE SYSTEM

DRSL

MANURE SPREADER SINGLE AXLE TRAILER.
UP TO 6.000 KG CAPACITY.





TECHNICAL INFORMATION

MOD.	DRSL 20	DRSL 30	DRSL 40	DRSL 50	DRSL 60
Dimensions (cm)	120x250 H sideboard: 40	140x240 H sideboard: 50	160x300 H sideboard: 50	180x350 H sideboard: 50	200x400 H sideboard: 50
Total capacity rate (kg)	2000	3000	4000	5000	6000
Unladen Weight (kg)	798	1040	1360	1500	2060
Rollers No.	1 horizontal	2 horizontal or vertical	2 horizontal or 4 vertical	2 horizontal or 4 vertical	2 horizontal or 4 vertical
Pneumatic	22,5x8,0 - 12 PR10	200/60 - R14,5	13,0/55-16 PR18	11,5/80 - 15,3 - PR14	285/70 - R19,5

STANDARD EQUIPMENTS

- MANURE SPREADER WITH SPIRAL BLADES
- 2 SPEEDS WITH REVERSE
- 2 SLIDING LINKS CHAINS
- “ADR” AXLE
- REAR ROLLERS PROTECTIVE DEVICE
- SMOOTH PLATE PLATFORM
- 2 WINCH HEADS
- SIDE HOOKS
- LATERAL EXTENDABLE SIDEBOARD
- SIDEBOARD EXTENSIONS QUICK CONNECTION
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL


HYDRAULIC BRAKE


ZINC-COATED TOOLBOX


CARDAN JOINT


TRA CHARGE FOR THIRD CHAIN


HYDRAULIC FEED SYSTEM


MOTOR AXLE


HOT ZINC-COATED SIDEBOARDS



HYDRAULIC STAND FOOT


DOUBLE SIDEBOARD


STEERING SHAFT

DCB

WATER TANKER TRAILER. UP TO 6.000 KG CAPACITY.





ZINC-COATED TANK VERSION



TECHNICAL INFORMATION

MOD.	DCB 25	DCB 35	DCB 60
Dimensions (cm)	150x230	160x260	180x312
Total capacity rate (kg)	2400	3500	6000
Unladen Weight (kg)	400	500	800
Capacity Lt.	2000	3000	4000
Pneumatic	10,0/80 - 12 PR8	10,0/75 PR 12	11.5/80 - 15 PR18

STANDARD EQUIPMENTS

- HOT ZINC-COATED COMMERCIAL TANK
- STAINLESS STEEL FLOWER EMBOSSING TANK ASI 304
- "ADR" AXLE
- LOADING UPPER HOSE
- REAR GATE VALVE DIAM. 6 CM (TOTAL DUMPING)
- THREADED HATCH DIAM. 10 CM FOR DIRECT FUEL SUPPLY
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE (HYDRAULIC DCB 60)
- BRAND-NEW TYRES COVERED BY GUARANTEE
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL



HYDRAULIC BRAKE



ZINC-COATED TOOLBOX



CARDAN JOINT



LEVEL BEAM



LOADED/UNLOADED PUMP



AUTOMATIC BLENDER (stainless tanker)



HYDRAULIC STAND FOOT



REAR HOSES HITCH MOUNTED CARRIER



ADJUSTABLE HELM



INSPECTION STEPLADDER



HOT ZINC-COATED SHELL



DRTU

REAR TILTING SYSTEM TRAILER FOR GRAPES CARRIAGE. UP TO 3.800 KG CAPACITY.



STANDARD EQUIPMENTS

- REAR TITLTING TANK BY RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- HANLDE OPENING REAR DOOR
- INTERCHANGEABLE HERMETICALLY SEALED GASKET
- EMBEDDED TYRE TO REDUCE LOADING HEIGHT
- REMOVABLE STAINLESS STEEL CARRIER TAIL LIGHT PLATE
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE
- BRAND-NEW TYRES WITH WHEEL CLEANER
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRTU 20	DRTU 28	DRTU 35	DRTU 42
Dimensions (cm)	140x230 - H side-board: 60	150x260 - H side-board: 60	160x270 - H side-board: 60	180x300 - H side-board: 70
Total capacity rate (kg)	2000	2500	3000	3800
Unladen Weight (kg)	440	500	600	620
Tank capacity (m^3)	1,9	2,3	2,5	3,7
Pneumatic	10,0/80 - 12 PR8	10,0/80 - 12 PR8	10,0/75 - 15,3 PR10	10,0/75 - 15,3 PR12
Ground clearence (cm)	120	125	130	135



OPTIONAL



HYDRAULIC BRAKE



WATER JERRY CAN



STAINLEES STEEL OPENING SIDEBOARD

DRD

GRAPES CARRIAGE SINGLE AXLE TRAILER WITH RAMP DUMPING SYSTEM. UP TO 6.000 KG.



TECHNICAL INFORMATION

MOD.	DRD 20	DRD 25	DRD 30	DRD 35	DRD 50/S	DRD 60/S
Dimensions (cm)	140x230 H sideboard: 58	150x260 H sideboard: 58	160x260 H sideboard: 58	170x280 H sideboard: 70	180x340 H sideboard: 85	180x340 H sideboard: 85
Total capacity rate (kg)	2000	2500	2800	3500	5000	6000
Unladen Weight (kg)	450	500	520	640	1020	1020
Tank capacity (m^3)	1,45	1,8	2,0	2,6	4,4	4,4
Pneumatic	10.0/80-12 PR8	10,0/75-15.3 PR10	10,0/75-15.3 PR10	10,0/75 - 15,3 PR12	11,5/80 - 15,3 PR16	11,5/80 - 15,3 PR18
Dumping heigth (cm)	92	95	95	108	120	120
Ground clearence (cm)	120	120	155	155	165	165

STANDARD EQUIPMENTS

- REAR TITLTING TANK BY RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- REAR RAMP DUMPING SYSTEM WITH CONVEYOR BLADES
- EMBEDDED TYRE TO REDUCE LOADING HEIGHT
- REMOVABLE ZINC-COATED LIGHTS AND LICENSE CERTIFICATE HOLDER
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE (DRF 60S HYDRAULIC)
- BRAND-NEW TYRES WITH WHEEL CLEANER
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES




OPTIONAL



HYDRAULIC BRAKE



ZINC-COATED TOOLBOX



STAINLEES STEEL OPENING SIDEBOARD



FIXED STAINLESS STEEL SIDEBOARD



DRF

Rimorchio con sollevamento del telaio a forbice per carico camion con portata fino a 6.000 Kg







TECHNICAL INFORMATION

MOD.	DRF 15/S	DRF 20/S	DRF 30/S	DRF 50/S	DRF 60/S
Dimensions (cm)	140x240 H sideboard: 55	150x260 H sideboard: 55	160x280 H sideboard: 75	180x340 H sideboard: 85	180x340 H sideboard: 85
Total capacity rate (kg)	1800	2000	3500	5000	6000
Unladen Weight (kg)	650	700	1100	1640	1640
Tank capacity (m^3)	1,45	1,8	3,0	4,4	4,4
Pneumatic	22,5x8,0 PR10	10,0/80-12 PR8	10,0/75-15,3 PR12	11.5/80 - 15.3 PR 16	11.5/80 - 15.3 PR 18
Dumping heigth (cm)	240	300	320	320	320
Ground clearence (cm)	125	125	160	160	160

STANDARD EQUIPMENTS

- PANTOGRAPH SHELL WITH TEFLON BUSHING AND HYDRAULIC LIFTING
- REAR TITLTING TANK BY RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- REAR RAMP DUMPING SYSTEM WITH CONVEYOR BLADES
- PIVOTS AND BUSHING WITH GREASER NIPPLES
- REMOVABLE ZINC-COATED LIGHTS AND LICENSE CERTIFICATE HOLDER
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE (DRF 60S HYDRAULIC)
- BRAND-NEW TYRES WITH WHEEL CLEANER
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL


HYDRAULIC BRAKE


INDIPENDENT HYDRAULIC DUMPING SYSTEM


ZINC-COATED TOOLBOX


STEERING SHAFT


SIDE STABILIZER STAND FOOT



HYDRAULIC STAND FOOT


STAINLEES STEEL OPENING SIDEBOARD


FIXED STAINLESS STEEL SIDEBOARD

DRF AUGER

FARMING TRAILER WITH AUGER EMPTYNG SYSTEM.
SCISSOR LIFT SYSTEM AVAILABLE. UP TO 6.000 KG CAPACITY.







STANDARD EQUIPMENTS

- PANTOGRAPH SHELL WITH TEFLON BUSHING AND HYDRAULIC LIFTING
- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- HYDRAULIC GEARED MOTOR WITH STAINLESS STEEL COUPLING BUSHINGS
- EMPTYING BY STAINLESS STEEL AUGER AISI 304 WITH TEFLON BLADE
- MANUAL OPENING REAR DOOR WITH HERMETICALLY SEALED GASKET
- ADJUSTABLE EMPTYING SPEED
- PIVOTS AND BUSHING WITH GREASER NIPPLES
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE FENDERS WITH RUBBER BUMPERS
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE (DRF 60C HYDRAULIC)
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES



TECHNICAL INFORMATION

MOD.	DRF 25C	DRF 30C	DRF 50C	DRF 60C
Dimensions (cm)	140x270	160x300	180x300	180x400
Total capacity rate (kg)	2500	3000	6000	6000
Unladen Weight (kg)	790	1000	1560	2230
Tank capacity (m^3)	2	3	4,8	6,4
Auger diameter (cm)	30	30	40	40
Pneumatic	10,0/80 - 12 PR8	10,0/75 - 15,3 PR12	11,5/80 - 15,3 PR18	435/50 R19,5
Ground clearence (cm)	125 - 135	125 - 135	185 - 200	200 - 215
Emptying heigth (cm)	60 - 220	60 - 300	70 - 260	80 - 300

OPTIONAL



HYDRAULIC BRAKE



INDIPENDENT HYDRAULIC DUMPING SYSTEM



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



SEMIAUTOMATIC COVERAGE WITH TARPAULIN



FIXED FLOW CONTROLLER



WEIGHT SYSTEM WITH PRINTER



HYDRAULIC STAND FOOT



WATER JERRY CAN



REAR HYDRAULIC DOOR



REAR FENDER WITH STAINLESS STEEL LIGHTS



2" BALL VALVE FLANGE/GAROLLA



REAR HYDRAULIC CONTROLS



DRIP GATE VALVE

DRL SINGLE AXLE

SINGLE AXLES FARMING OR GRAPES CARRIAGE TRAILER WITH BILATERAL HYDRAULIC TITLTING SYSTEM. UP TO 6.000 KG CAPACITY.



STANDARD EQUIPMENTS

- BILATERAL TILTING TANK BY DOUBLE EFFECT RAM AND QUICK CONNECTION WIHT TRACTOR OIL
- STAINLESS STEEL AISI 304 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- FLOW DIVIDER HYDRAULIC ENGINE
- FRUITS FLOW CONTROL PANEL
- THE LOWER CENTRE OF GRAVITY ALLOWS THE VEHICLE BOTH TO STAY FIRMLY ON THE ROAD AND DURING UNLOADING
- FOOT STAND SET UP
- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH "ADR" 8 COLUMNS INCREASED AXLES (DRL 140-200)
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BRAKING SYSTEM)
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND (SOLO PER DRL 100-120-140-200)
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRL 25	DRL 50	DRL 60
Dimensions (cm)	150x250 - H sideboard: 90	220x350 - H sideboard: 100	220x400 - H sideboard: 100
Total capacity rate (kg)	2500	5000	6000
Unladen Weight (kg)	700	1080	1300
Tank capacity (m^3)	2,5	5	6,2
Pneumatic	10,0/80 - R12 PR8	13.0/55 - 16 PR16	435/50 R19,5



OPTIONAL



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



SIDE STABILIZER STAND FOOT



HYDRAULIC STAND FOOT



SEMIAUTOMATIC COVERAGE WITH TARPAULIN



TARPAULIN HOSE AND HOOK



WATER JERRY CAN



REAR FENDER WITH STAINLESS STEEL LIGHTS

DRL TWO AXLES

TWO AXLES FARMING OR GRAPES CARRIAGE TRAILER WITH BILATERAL HYDRAULIC TITLTING SYSTEM. UP TO 14.000 KG CAPACITY.



STANDARD EQUIPMENTS

- BILATERAL TILTING TANK BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STAINLESS STEEL AISI 304 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- FLOW DIVIDER HYDRAULIC ENGINE
- FRUITS FLOW CONTROL PANEL
- THE LOWER CENTRE OF GRAVITY ALLOWS THE VEHICLE BOTH TO STAY FIRMLY ON THE ROAD AND DURING UNLOADING
- FOOT STAND SET UP
- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH "ADR" 8 COLUMNS INCREASED AXLES (DRL 140-200)
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BRAKING SYSTEM)
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND (SOLO PER DRL 100-120-140-200)
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRL 100	DRL 120 N	DRL 140 N
Dimensions (cm)	220x400 - H sideboard: 100	240x400 - H sideboard: 150	240x470 - H sideboard: 150
Axles No.	2	2	2
Total capacity rate (kg)	10000	12000	14000
Unladen Weight (kg)	2380	2750	3600
Tank capacity (m^3)	8,5	10,5	12,5
Pneumatic	435/50 R19.5	435/50 R19.5	435/50 R19.5
Braking	PNEUMATICS HYDRAULIC	PNEUMATICS HYDRAULIC	PNEUMATICS HYDRAULIC



OPTIONAL



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



SIDE STABILIZER STAND FOOT



STEERING AXLE



STAINLESS INSPECTION STEPLADDER



TARPAULIN HOSE AND HOOK



WATER JERRY CAN



REAR FENDER WITH STAINLESS STEEL LIGHTS



SEMIAUTOMATIC COVERAGE WITH TARPAULIN

DRL THREE AXLES

THREE AXLES FARMING OR GRAPES CARRIAGE TRAILER WITH BILATERAL HYDRAULIC TITLTING SYSTEM. UP TO 20.000 KG CAPACITY.



STANDARD EQUIPMENTS

- BILATERAL TILTING TANK BY DOUBLE EFFECT RAM AND QUICK CONNECTION WIHT TRACTOR OIL
- STAINLESS STEEL AISI 304 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- FLOW DIVIDER HYDRAULIC ENGINE
- FRUITS FLOW CONTROL PANEL
- THE LOWER CENTRE OF GRAVITY ALLOWS THE VEHICLE BOTH TO STAY FIRMLY ON THE ROAD AND DURING UNLOADING
- FOOT STAND SET UP
- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH "ADR" 8 COLUMNS INCREASED AXLES (DRL 140-200)
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BREAKING SYSTEM)
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND (SOLO PER DRL 100-120-140- 200)
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRL 200
Dimensions (cm)	240x585 - H sideboard: 165
Axles No.	3
Total capacity rate (kg)	20000
Unladen Weight (kg)	58000
Tank capacity (m^3)	18,5
Pneumatic	385/55 R22.5
Braking	PNEUMATICS

OPTIONAL



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



SIDE STABILIZER STAND FOOT



WATER JERRY CAN



STAINLESS INSPECTION STEPLADDER



TARPAULIN HOSE AND HOOK



REAR FENDER WITH STAINLESS STEEL LIGHTS



SEMIAUTOMATIC COVERAGE WITH TARPAULIN

VSC

GRAPES TANKS



TECHNICAL INFORMATION

MOD.	VSC0020	VSC0030	VSC0040	VSC0050	VSC0060	VSC0065	VSC0070	VSC0080
Dimensions (cm)	140x230 H sideboard: 60	150x260 H sideboard: 60	160x270 H sideboard: 60	180x310 H sideboard: 70	200x360 H sideboard: 90	210x420 H sideboard: 90	240x480 H sideboard: 100	240x620 H sideboard: 100
Total capacity rate (m^3)	2,10	2,60	2,80	3,90	6,50	7,95	11,50	14,90


Upon request we also build tanks of different dimensions to be assembled on different trailer platforms or on trucks.




REAR HYDRAULIC BEAMING

STANDARD EQUIPMENTS

- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REINFORCED FRONT AND TANK CENTER STEERING COLUMN (FOR UP 4000 KG AVAILABLE)
- MANUAL OPENING WITH LEVER
- REAR DOOR TANK BLOCKAGE SYSTEM

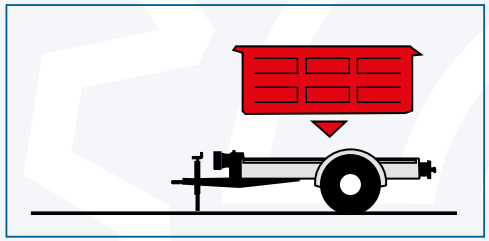

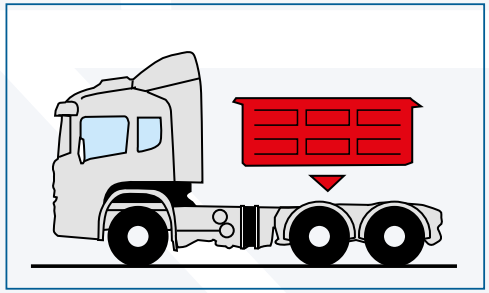

OPTIONAL



REAR HYDRAULIC BEAMING



CENTRAL FRUITS FLOW CONTROL



SEMIAUTOMATIC COVERAGE WITH TARPAULIN



TARPAULIN HOSE AND HOOK

VSZ

HYDRAULIC LIFT WITH STAINLESS
STEEL GRAPE CONTAINER





STANDARD EQUIPMENTS

- SIMPLE ACTING PISTON
- TRACTOR QUICK CONNECTIONS CONTROLS
- THREE POINT HITCH
- PARKING STAND FEET
- PAINTED STRUCTURE WITH HOT ZINC-COATED SHELL
- QUICK CONNECTIONS SUPPORT



Containing sideboard
Olive net



Tilting tank
VSZ-C



Resealable forks
VSZ-F

TECHNICAL INFORMATION

VSZ 120	Capacity (kg)	1000	Weight (kg)	170

EQUIPMENTS	VSZ-6	VSZ-8	VSZ-C	VSZ-F
Width (cm) Dimensions (cm)	126	151	150x90x30	-
Low lift heigth	122	122	-	-
Dumping heigt	142	142	165	161
Capacity (m^3)	0,6	0,8	???	-
Weight (kg)	155	160	150	100

VSZ 140	Capacity (kg)	1000	Weight (kg)	170

EQUIPMENTS	VSZ-6	VSZ-8	VSZ-C	VSZ-F
Width (cm) Dimensions (cm)	126	151	150x90x30	-
Low lift heigth	231	231	-	-
Dumping heigt	271	271	205	201
Capacity (m^3)	0,6	0,8	???	-
Weight (kg)	155	160	150	100

OPTIONAL



TWO POINT HITCH



DOUBLE ACTING AND DOUBLE LEVER SPOOL VALVE



CONTAINING SIDEBOARD



OLIVE HARVESTING NET

D'EUSANIO
RIMORCHI

Special Processing

D'Eusanio s.r.l. build for commission any models of tanks with the certification possibility as rare example.











Tyres design



22.5x8.0-12



23x10.50-12



185/65 R14
185/60 R15
195/70 R15
205/60 R15
215/70 R15
225/70 R15



200/60 R14.5



205/65 R17.5
205/75 R17.5
215/75 R17.5
225/75 R17.5
235/75 R17.5
245/70 R17.5



10.0/80-12
10.0/75-15.3
11.5/80-15.3



10.0/80-12
TRACTOR
10.0/75-15.3
TRACTOR
11.5/80-15.3
TRACTOR



13.0/55-16
13.0/65-18
14.0/65-16
15.0/55-17
19.0/45-17
400/60-15.5



265/70 R19.5
285/70 R19.5
305/70 R19.5
385/55 R19.5
425/55 R19.5
435/50 R19.5
445/45 R19.5
315/60 R22.5
385/55 R22.5
425/65 R22.5
445/65 R22.5



500/60 R22.5
550/60 R22.5
560/45 R22.5
560/60 R22.5

Quality and experience at your service

D'EUSANIO
RIMORCHI

D'Eusanio S.r.l.
Costruzioni Meccaniche

Via Don Morosini, 66010 - Tollo (CH)
Tel. 0871 961682 | info@deusanio.com
www.deusanio.com |