
D'EUSANIO
RIMORCHI
Quality and experience
at your experience
D'EUSANIO
D'EUSANIO
RIMORCHI
PRODUCTS CATALOG



DRTU

REAR TILTING SYSTEM TRAILER FOR GRAPES CARRIAGE. UP TO 3.800 KG CAPACITY.



STANDARD EQUIPMENTS

- REAR TITLTING TANK BY RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- HANLDE OPENING REAR DOOR
- INTERCHANGEABLE HERMETICALLY SEALED GASKET
- EMBEDDED TYRE TO REDUCE LOADING HEIGHT
- REMOVABLE STAINLESS STEEL CARRIER TAIL LIGHT PLATE
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE
- BRAND-NEW TYRES WITH WHEEL CLEANER
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRTU 20	DRTU 28	DRTU 35	DRTU 42
Dimensions (cm)	140x230 - H side-board: 60	150x260 - H side-board: 60	160x270 - H side-board: 60	180x300 - H side-board: 70
Total capacity rate (kg)	2000	2500	3000	3800
Unladen Weight (kg)	440	500	600	620
Tank capacity (m^3)	1,9	2,3	2,5	3,7
Pneumatic	10,0/80 - 12 PR8	10,0/80 - 12 PR8	10,0/75 - 15,3 PR10	10,0/75 - 15,3 PR12
Ground clearence (cm)	120	125	130	135



OPTIONAL



HYDRAULIC BRAKE



WATER JERRY CAN



STAINLEES STEEL OPENING SIDEBOARD

DRD

GRAPES CARRIAGE SINGLE AXLE TRAILER WITH RAMP DUMPING SYSTEM. UP TO 6.000 KG.



TECHNICAL INFORMATION

MOD.	DRD 20	DRD 25	DRD 30	DRD 35	DRD 50/S	DRD 60/S
Dimensions (cm)	140x230 H sideboard: 58	150x260 H sideboard: 58	160x260 H sideboard: 58	170x280 H sideboard: 70	180x340 H sideboard: 85	180x340 H sideboard: 85
Total capacity rate (kg)	2000	2500	2800	3500	5000	6000
Unladen Weight (kg)	450	500	520	640	1020	1020
Tank capacity (m^3)	1,45	1,8	2,0	2,6	4,4	4,4
Pneumatic	10.0/80-12 PR8	10,0/75-15.3 PR10	10,0/75-15.3 PR10	10,0/75 - 15,3 PR12	11,5/80 - 15,3 PR16	11,5/80 - 15,3 PR18
Dumping heigth (cm)	92	95	95	108	120	120
Ground clearence (cm)	120	120	155	155	165	165

STANDARD EQUIPMENTS

- REAR TITLTING TANK BY RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- REAR RAMP DUMPING SYSTEM WITH CONVEYOR BLADES
- EMBEDDED TYRE TO REDUCE LOADING HEIGHT
- REMOVABLE ZINC-COATED LIGHTS AND LICENSE CERTIFICATE HOLDER
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE (DRF 60S HYDRAULIC)
- BRAND-NEW TYRES WITH WHEEL CLEANER
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES




OPTIONAL



HYDRAULIC BRAKE



ZINC-COATED TOOLBOX



STAINLEES STEEL OPENING SIDEBOARD



FIXED STAINLESS STEEL SIDEBOARD



DRF

Rimorchio con sollevamento del telaio a forbice per carico camion con portata fino a 6.000 Kg







TECHNICAL INFORMATION

MOD.	DRF 15/S	DRF 20/S	DRF 30/S	DRF 50/S	DRF 60/S
Dimensions (cm)	140x240 H sideboard: 55	150x260 H sideboard: 55	160x280 H sideboard: 75	180x340 H sideboard: 85	180x340 H sideboard: 85
Total capacity rate (kg)	1800	2000	3500	5000	6000
Unladen Weight (kg)	650	700	1100	1640	1640
Tank capacity (m^3)	1,45	1,8	3,0	4,4	4,4
Pneumatic	22,5x8,0 PR10	10,0/80-12 PR8	10,0/75-15,3 PR12	11.5/80 - 15.3 PR 16	11.5/80 - 15.3 PR 18
Dumping heigth (cm)	240	300	320	320	320
Ground clearence (cm)	125	125	160	160	160

STANDARD EQUIPMENTS

- PANTOGRAPH SHELL WITH TEFLON BUSHING AND HYDRAULIC LIFTING
- REAR TITLTING TANK BY RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- REAR RAMP DUMPING SYSTEM WITH CONVEYOR BLADES
- PIVOTS AND BUSHING WITH GREASER NIPPLES
- REMOVABLE ZINC-COATED LIGHTS AND LICENSE CERTIFICATE HOLDER
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE (DRF 60S HYDRAULIC)
- BRAND-NEW TYRES WITH WHEEL CLEANER
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES

OPTIONAL


HYDRAULIC BRAKE


INDIPENDENT HYDRAULIC DUMPING SYSTEM


ZINC-COATED TOOLBOX


STEERING SHAFT


SIDE STABILIZER STAND FOOT



HYDRAULIC STAND FOOT


STAINLEES STEEL OPENING SIDEBOARD


FIXED STAINLESS STEEL SIDEBOARD

DRF AUGER

FARMING TRAILER WITH AUGER EMPTYNG SYSTEM.
SCISSOR LIFT SYSTEM AVAILABLE. UP TO 6.000 KG CAPACITY.







STANDARD EQUIPMENTS

- PANTOGRAPH SHELL WITH TEFLON BUSHING AND HYDRAULIC LIFTING
- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- HYDRAULIC GEARED MOTOR WITH STAINLESS STEEL COUPLING BUSHINGS
- EMPTYING BY STAINLESS STEEL AUGER AISI 304 WITH TEFLON BLADE
- MANUAL OPENING REAR DOOR WITH HERMETICALLY SEALED GASKET
- ADJUSTABLE EMPTYING SPEED
- PIVOTS AND BUSHING WITH GREASER NIPPLES
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE FENDERS WITH RUBBER BUMPERS
- SIDE HOOKS
- MECHANICAL PARKING BRAKE AND PREDISPOSITION FOR HYDRAULIC BRAKE (DRF 60C HYDRAULIC)
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- FOOT STAND
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- LIGHTING SYSTEM
- VEHICLES REGISTRATION CERTIFICATES



TECHNICAL INFORMATION

MOD.	DRF 25C	DRF 30C	DRF 50C	DRF 60C
Dimensions (cm)	140x270	160x300	180x300	180x400
Total capacity rate (kg)	2500	3000	6000	6000
Unladen Weight (kg)	790	1000	1560	2230
Tank capacity (m^3)	2	3	4,8	6,4
Auger diameter (cm)	30	30	40	40
Pneumatic	10,0/80 - 12 PR8	10,0/75 - 15,3 PR12	11,5/80 - 15,3 PR18	435/50 R19,5
Ground clearence (cm)	125 - 135	125 - 135	185 - 200	200 - 215
Emptying heigth (cm)	60 - 220	60 - 300	70 - 260	80 - 300

OPTIONAL



HYDRAULIC BRAKE



INDIPENDENT HYDRAULIC DUMPING SYSTEM



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



SEMIAUTOMATIC COVERAGE WITH TARPAULIN



FIXED FLOW CONTROLLER



WEIGHT SYSTEM WITH PRINTER



HYDRAULIC STAND FOOT



WATER JERRY CAN



REAR HYDRAULIC DOOR



REAR FENDER WITH STAINLESS STEEL LIGHTS



2" BALL VALVE FLANGE/GAROLLA



REAR HYDRAULIC CONTROLS



DRIP GATE VALVE

DRL SINGLE AXLE

SINGLE AXLES FARMING OR GRAPES CARRIAGE TRAILER WITH BILATERAL HYDRAULIC TITLTING SYSTEM. UP TO 6.000 KG CAPACITY.



STANDARD EQUIPMENTS

- BILATERAL TILTING TANK BY DOUBLE EFFECT RAM AND QUICK CONNECTION WIHT TRACTOR OIL
- STAINLESS STEEL AISI 304 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- FLOW DIVIDER HYDRAULIC ENGINE
- FRUITS FLOW CONTROL PANEL
- THE LOWER CENTRE OF GRAVITY ALLOWS THE VEHICLE BOTH TO STAY FIRMLY ON THE ROAD AND DURING UNLOADING
- FOOT STAND SET UP
- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH "ADR" 8 COLUMNS INCREASED AXLES (DRL 140-200)
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BRAKING SYSTEM)
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND (SOLO PER DRL 100-120-140-200)
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRL 25	DRL 50	DRL 60
Dimensions (cm)	150x250 - H sideboard: 90	220x350 - H sideboard: 100	220x400 - H sideboard: 100
Total capacity rate (kg)	2500	5000	6000
Unladen Weight (kg)	700	1080	1300
Tank capacity (m^3)	2,5	5	6,2
Pneumatic	10,0/80 - R12 PR8	13.0/55 - 16 PR16	435/50 R19,5



OPTIONAL



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



SIDE STABILIZER STAND FOOT



HYDRAULIC STAND FOOT



SEMIAUTOMATIC COVERAGE WITH TARPAULIN



TARPAULIN HOSE AND HOOK



WATER JERRY CAN



REAR FENDER WITH STAINLESS STEEL LIGHTS

DRL TWO AXLES

TWO AXLES FARMING OR GRAPES CARRIAGE TRAILER WITH BILATERAL HYDRAULIC TITLTING SYSTEM. UP TO 14.000 KG CAPACITY.



STANDARD EQUIPMENTS

- BILATERAL TILTING TANK BY DOUBLE EFFECT RAM AND QUICK CONNECTION WITH TRACTOR OIL
- STAINLESS STEEL AISI 304 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- FLOW DIVIDER HYDRAULIC ENGINE
- FRUITS FLOW CONTROL PANEL
- THE LOWER CENTRE OF GRAVITY ALLOWS THE VEHICLE BOTH TO STAY FIRMLY ON THE ROAD AND DURING UNLOADING
- FOOT STAND SET UP
- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH "ADR" 8 COLUMNS INCREASED AXLES (DRL 140-200)
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BRAKING SYSTEM)
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND (SOLO PER DRL 100-120-140-200)
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRL 100	DRL 120 N	DRL 140 N
Dimensions (cm)	220x400 - H sideboard: 100	240x400 - H sideboard: 150	240x470 - H sideboard: 150
Axles No.	2	2	2
Total capacity rate (kg)	10000	12000	14000
Unladen Weight (kg)	2380	2750	3600
Tank capacity (m^3)	8,5	10,5	12,5
Pneumatic	435/50 R19.5	435/50 R19.5	435/50 R19.5
Braking	PNEUMATICS HYDRAULIC	PNEUMATICS HYDRAULIC	PNEUMATICS HYDRAULIC



OPTIONAL



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



SIDE STABILIZER STAND FOOT



STEERING AXLE



STAINLESS INSPECTION STEPLADDER



TARPAULIN HOSE AND HOOK



WATER JERRY CAN



REAR FENDER WITH STAINLESS STEEL LIGHTS



SEMIAUTOMATIC COVERAGE WITH TARPAULIN

DRL THREE AXLES

THREE AXLES FARMING OR GRAPES CARRIAGE TRAILER WITH BILATERAL HYDRAULIC TITLTING SYSTEM. UP TO 20.000 KG CAPACITY.



STANDARD EQUIPMENTS

- BILATERAL TILTING TANK BY DOUBLE EFFECT RAM AND QUICK CONNECTION WIHT TRACTOR OIL
- STAINLESS STEEL AISI 304 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- FLOW DIVIDER HYDRAULIC ENGINE
- FRUITS FLOW CONTROL PANEL
- THE LOWER CENTRE OF GRAVITY ALLOWS THE VEHICLE BOTH TO STAY FIRMLY ON THE ROAD AND DURING UNLOADING
- FOOT STAND SET UP
- HIGH RESISTANCE REINFORCED STRUCTURE
- LEAF SPRING SUSPENSIONS WITH "ADR" 8 COLUMNS INCREASED AXLES (DRL 140-200)
- HYDRAULIC OR AIR BRAKE WITH AUTOMATIC SHUT OFF PARKING BRAKE
- BRAKE CORRECTING DEVICE (ONLY FOR AIR BREAKING SYSTEM)
- INDUSTRIAL TWHEEL WITH 8 HOLES INDUSTRIAL RIM
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- PARACHUTE END-STROKE VALVE
- HYDRAULIC FOOT STAND (SOLO PER DRL 100-120-140- 200)
- QUICK CONNECTIONS SUPPORT AND 7-POLE SOCKET
- REAR ZINC-COATED METAL SHEET BUMPERS AND RUBBER BUMPERS
- REMOVABLE ZINC-COATED IRON FENDERS WITH RUBBER BUMPERS AND REAR SPLASH-PROOF
- LIGHTING SYSTEM WITH INDUSTRIAL LIGHTS
- VEHICLES REGISTRATION CERTIFICATES

TECHNICAL INFORMATION

MOD.	DRL 200
Dimensions (cm)	240x585 - H sideboard: 165
Axles No.	3
Total capacity rate (kg)	20000
Unladen Weight (kg)	58000
Tank capacity (m^3)	18,5
Pneumatic	385/55 R22.5
Braking	PNEUMATICS

OPTIONAL



ZINC-COATED TOOLBOX



STAINLESS STEEL TOOLBOX



SIDE STABILIZER STAND FOOT



WATER JERRY CAN



STAINLESS INSPECTION STEPLADDER



TARPAULIN HOSE AND HOOK



REAR FENDER WITH STAINLESS STEEL LIGHTS



SEMIAUTOMATIC COVERAGE WITH TARPAULIN

VSC

GRAPES TANKS



TECHNICAL INFORMATION

MOD.	VSC0020	VSC0030	VSC0040	VSC0050	VSC0060	VSC0065	VSC0070	VSC0080
Dimensions (cm)	140x230 H sideboard: 60	150x260 H sideboard: 60	160x270 H sideboard: 60	180x310 H sideboard: 70	200x360 H sideboard: 90	210x420 H sideboard: 90	240x480 H sideboard: 100	240x620 H sideboard: 100
Total capacity rate (m^3)	2,10	2,60	2,80	3,90	6,50	7,95	11,50	14,90


Upon request we also build tanks of different dimensions to be assembled on different trailer platforms or on trucks.




REAR HYDRAULIC BEAMING

STANDARD EQUIPMENTS

- STAINLESS STEEL AISI 304 20/10 FLOWER EMBOSSING TANK FOR FOOD CONVEYING WITH BRUSHED STAINLESS STEEL AND TIG WELDED SHELL
- POLYURETHANE PAINT WITH EPOXORY PRIMER. HIGH WEAR RESISTANCE
- REINFORCED FRONT AND TANK CENTER STEERING COLUMN (FOR UP 4000 KG AVAILABLE)
- MANUAL OPENING WITH LEVER
- REAR DOOR TANK BLOCKAGE SYSTEM

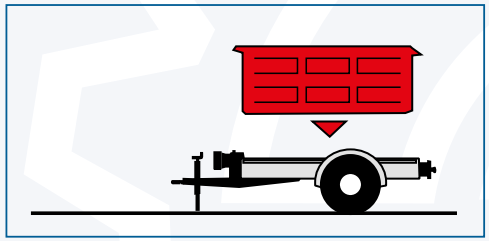

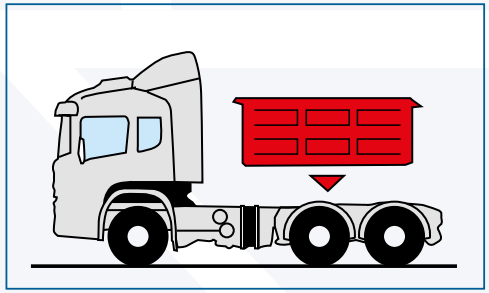

OPTIONAL



REAR HYDRAULIC BEAMING



CENTRAL FRUITS FLOW CONTROL



SEMIAUTOMATIC COVERAGE WITH TARPAULIN



TARPAULIN HOSE AND HOOK